Project		
,		
Cotologue po		



CRVE PLASTIC COMBO RUNNING MAN



FEATURES & SPECIFICATIONS

contour to compliment any interior design.

CIRCUITRY

- · LED ultra bright light source
- 120/277/347 VAC input
- High-output MR16 LED technology
- Fully automatic, current limiter charger
- Maintenance free, Ni-Cad battery
- Low voltage disconnect protection
- Dry location
- Operating temperature:
 - +10°C to +25°C
- Auto-test available

MECHANICAL

- · High impact thermoplastic construction
- Universal faces
- · Ceiling mount and Wall mount
- · White colour is standard
- · Fully adjustable, LED heads are standard

APPROVALS

· CSA 22.2 No. 141-15

OVERVIEW					
LIGHT SOURCE	LED	SIGN EMERGENCY POWER CONSUMPTION (W)	2		
INPUT VOLTAGE (V AC)	120/277/347	OUTPUT CAPACITY (W)	25-50		
SIGN POWER CONSUMPTION (W)	2				







Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

AimLite

CRVE • REV. 2023-6-1 т 514 227-1288 TF 1866 348-2374 aimlite.com

CRVE

TYPICAL SPECIFICATION



TYPICAL SPECIFICATION


Supply and install Aimlite's CRVE High impact thermoplastic Running Man and Battery combination unit. The sign shall operate from 120/277/347 V AC Input. The sign shall be suitable for wall or ceiling mount and come complete with 3 Running Man fibers for universal direction. The frame and back plate shall be high impact, UV stabilized, thermoplastic construction and offer quick snap faceplates and universal canopy for rapid and simple installation. The combination unit shall be 120/277/347 V AC, suitable for dry locations, suitable for an ambient temperature 10°C to 25°C, provide a minimum of 30 minutes emergency power duration and consist of two 12v 2, 5, or 7 W LED heads. The unit shall be temperature compensated, maintenance free, Ni-Cad battery. The unit shall be CSA C22.2 C141-15 certified and ICES compliant. The Aimlite Sign and Battery combination unit shall be CRVE




TECHNICAL SPECIFICATION TABLE

PART NUMBER	DC VOLTS (V DC)	WATTS	NBR OF FACE	NBR OF HEADS	LAMP (W)	LIGHT SOURCE	INPUT VOLTS (V AC)	COLOUR	OPTION
CRVE1225U-2MD2	12	25	UNIVERSAL	2	2	LED	120/277/347	WHITE	
CRVE1225U-2MD2/ATD	12	25	UNIVERSAL	2	2	LED	120/277/347	WHITE	AUTO TEST
CRVE1225U-2MD5	12	25	UNIVERSAL	2	5	LED	120/277/347	WHITE	
CRVE1225U-2MD5/ATD	12	25	UNIVERSAL	2	5	LED	120/277/347	WHITE	AUTO TEST
CRVE1225U-2MD7	12	25	UNIVERSAL	2	7	LED	120/277/347	WHITE	
CRVE1225U-2MD7/ATD	12	25	UNIVERSAL	2	7	LED	120/277/347	WHITE	AUTO TEST
CRVE1250U-2MD2	12	50	UNIVERSAL	2	2	LED	120/277/347	WHITE	
CRVE1250U-2MD2/ATD	12	50	UNIVERSAL	2	2	LED	120/277/347	WHITE	AUTO TEST
CRVE1250U-2MD5	12	50	UNIVERSAL	2	5	LED	120/277/347	WHITE	
CRVE1250U-2MD5/ATD	12	50	UNIVERSAL	2	5	LED	120/277/347	WHITE	AUTO TEST
CRVE1250U-2MD7	12	50	UNIVERSAL	2	7	LED	120/277/347	WHITE	
CRVE1250U-2MD7/ATD	12	50	UNIVERSAL	2	7	LED	120/277/347	WHITE	AUTO TEST

DIMENSIONS

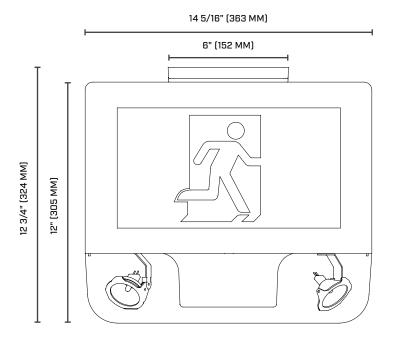

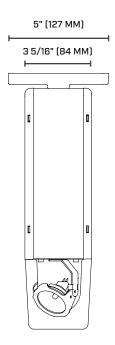

TF 1866 348-2374