


CXWW

COMBO RAINSTORM

NEMA4X/EEMAC4X

The AimLite CXWW series of NEMA4X and EEMAC4X rated water tight combination EXIT signs provides exceptional protection from extreme environments. Suitable for outdoor and wash-down locations, the CXWW series is designed using a thermoplastic housing. The housing features four enclosed, integral wall mounting points and a moulded gasket that completely seals the housing from the elements.

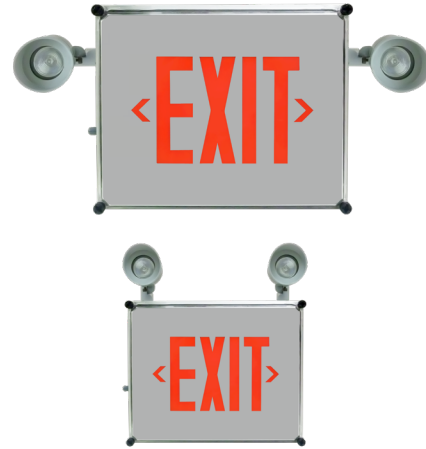

FEATURES & SPECIFICATIONS

CIRCUITRY

- LED ultra bright light source
- 120/347 V AC 60 Hz Input, field selectable
- 1.8 W power consumption for LED "Exit" portion of combinations sign
- LED Emergency DC wattages as follows:
6 V DC = 1.0 W 12 V DC = 1.5 W
- Wattage capacities from 36 W to 100 W
- 30 minutes emergency power duration standard
- Diagnostic/pilot LEDs for AC ON and CHARGE
- Fully automatic, current limited charger
- Temperature compensated
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery

MECHANICAL




- Heavy-duty fiberglass reinforced thermoplastic housing
- Face plate is form molded one piece gasket from dust and water
- Faceplate(s) is secured to the housing with four captive oversized screws
- One-way breather for escape of gasses or condensation installed on all models
- Grey finish standard

COMPLIANCE

- Meets requirements of ICES-005

APPROVALS

- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11

OVERVIEW			
LIGHT SOURCE	LED	DC VOLTAGE/WATTAGE	6 V DC = 1.0 W 12 V DC = 1.5 W
INPUT VOLTAGE	120/347 V AC 60 HZ		
INPUT POWER [W]	1.8	OUTPUT POWER [W]	36-100
<div>  LED  ICES 005  SA Energy Verified </div>			


Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.

ORDERING GUIDE

SERIES	NBR OF FACES	MOUNTING	FRAME COLOR	MASK COLOR	HEAD/LAMP	LAMP
CXWW0636	1 - SINGLE FACE	C - CEILING MOUNT	GRY - GREY	GRY - GREY	00 - NO HEADS	SEE LAMP SELECTION CHART BELOW
CXWW0650	2 - DOUBLE FACE	W - WALL MOUNT			1MW - 1 MR16	
CXWW1236					2MW - 2 MR16	
CXWW1250						
CXWW1272						
CXWW12100						
SEE RATING CHART BELOW						

LAMP SELECTION

	6 VOLTS	12 VOLTS
MR16 - SMALL HEAD C/W MR16 LAMP		
LED	4WLR, 5WLA	4WLR, 5WLA, 6WLA, 7WLA
QUARTZ HALOGEN	10WQ	20WQ, 35WQ



TYPE MW - MR16

Die cast
50W max.

LUMEN TABLE

WATTS	LUMENS
4W LR	388
5W LA	435
6W LA	507
7W LA	652

MODEL RATINGS

WATTAGE CAPACITIES				
MODEL	VOLTAGE (V)	30 MIN.	60 MIN.	90 MIN.
CXWW0636	6V	36	18	12
CXWW0650	6V	50	25	16
CXWW1236	12V	36	18	12
CXWW1250	12V	50	25	16
CXWW1272	12V	72	36	24
CXWW12100	12V	100	50	33

DIMENSIONS

