

# RMEC EDGE-LIT



The RMEC series is our entry-level edge-lit running man signs. RMEC is surface mount and available in AC/DC and internally self-powered versions.

## FEATURES & SPECIFICATIONS

### CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120-347 VAC Input
- 120-347 V/0.08 A/3 W max power consumption
- Emergency DC wattages as follows:  
 6 VDC = 1 W  
 12 VDC = 2 W  
 24 VDC = 4 W

### SELF-POWERED

- LED light source
- 120-347 VAC Input
- Sealed Ni-Cad battery
- 120 minutes emergency duration
- Solid state transfer and battery charger

- Aluminum frame and polycarbonate panel
- Universal ceiling, wall or side mount
- Universal single and double face
- 3 pictograms panels included: 1 without arrow, 2 with arrow.

### APPROVALS

- CSA Certified to C22.2 #141-15

### COMPLIANCES

- Meets requirements of ICES-005

OVERVIEW			
<b>LIGHT SOURCE</b>	LED	<b>INPUT VOLTAGE (V CA)</b>	120-347
		<b>DC VOLTAGE/POWER</b>	6 V DC = 1 W 12 V DC = 2 W 24 V DC = 4 W
 QUICKSHIP	 LED	 ICES 005	 Energy Verified Energie Vérifiée

## POWER CONSUMPTION TABLE

MODEL	VOLTAGE	POWER	CURRENT
RMEC-BAT1	120 V	4 W	0.24 A
	277 V	4 W	0.24 A
	347 V	4 W	0.24 A
RMEC-UNVDC	120 V	3 W	0.06 A
	277 V	3 W	0.06 A
	347 V	3 W	0.06 A

For complete warranty details, please see our terms and conditions on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

## QUICK SHIP ORDERING GUIDE




PART NUMBER	DC VOLTS [VDC]	NBR OF FACES	LIGHT SOURCE	INPUT VOLTS	COLOR
RMEC-BAT1	1B	UNIVERSAL	LED	120-347	WHITE
RMEC-UNVDC	UDC	UNIVERSAL	LED	120-347	WHITE

QUICK SHIP: Product availability is subject to change without notice. Please contact your AimLite customer service representative to confirm inventory levels at time of order.

## ACCESSORIES (ORDER SEPARATELY)

PART NUMBER	TYPE
FIBER-RMEC-CG	RUNNING MAN FIBER NO ARROW

## DIMENSIONS

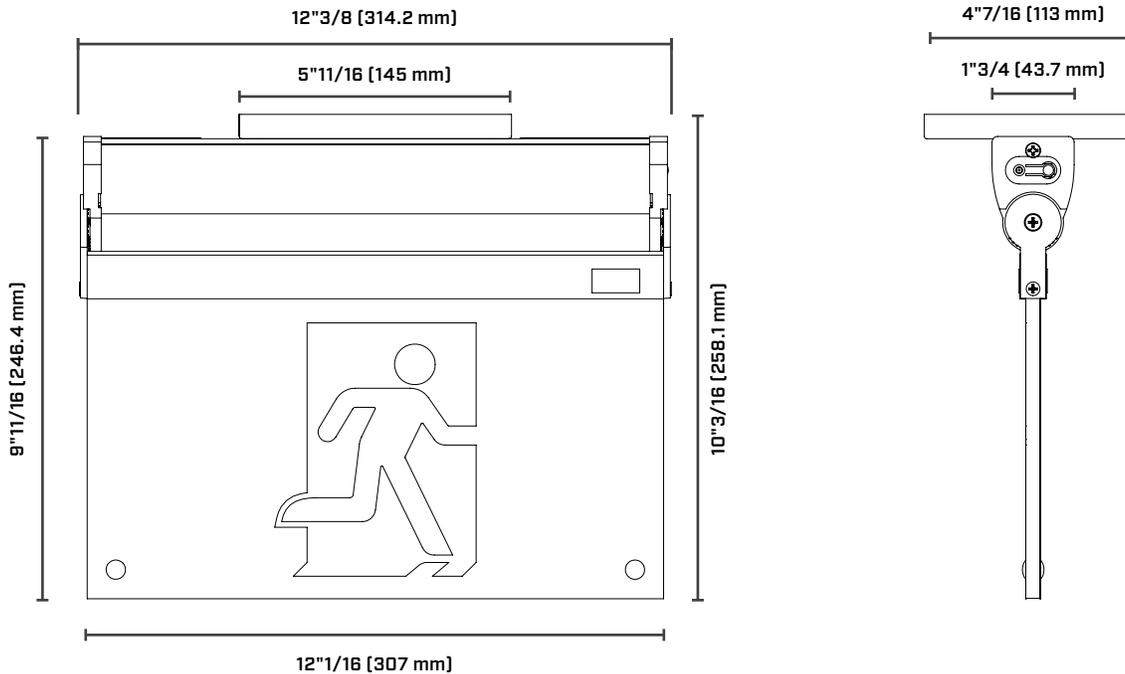

## CONFIGURATIONS



Comes standard (single face) with three pictogram legends for direction selection.



For double face no arrow options, please order the RMEC, along with the following fiber: FIBER-RMEC-CG.