









# TRACK ACCESSORIES

Our track accessories variety give you the flexibility to built your own design where light is needed.  
Those accessories are compatible with J tracks, adapted for single circuit and available in white or black.


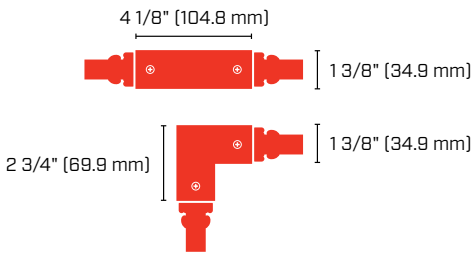

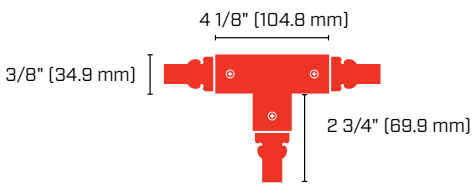

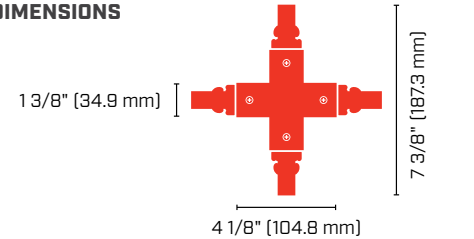


## ELECTRICAL FEED





	<b>FLOATING FEED</b>  Provides power at any point along the track when installed with a standard junction box.	<b>MODEL NO.</b>  AT26	<b>FINISH<sup>1</sup></b>  ● <b>BK</b> -Black ○ <b>WH</b> -White	<b>DIMENSIONS</b>  
	<b>SURFACE CONDUIT END FEED</b>  For surface conduit wiring, to be installed with standard 1/2" connector.  <b>REVERSE POLARITY</b>  For use in opposite polarity orientation compared to standard feed connectors.	<b>MODEL NO.</b>  AT27  AT27A	<b>FINISH<sup>1</sup></b>  ● <b>BK</b> -Black ○ <b>WH</b> -White	<b>DIMENSIONS</b>  
	<b>END FEED (TOP ACCESS)</b>  End feed for direct wiring to feed track from above with flexible conduit, BX, etc., or end feed in suspended applications. To be used with 1/2" connector.  <b>REVERSE POLARITY</b>  For use in opposite polarity orientation compared to standard feed connectors.	<b>MODEL NO.</b>  AT38  AT38A	<b>FINISH<sup>1</sup></b>  ● <b>BK</b> -Black ○ <b>WH</b> -White	<b>DIMENSIONS</b>  
	<b>MONOPOINT</b>  For use in opposite polarity orientation compared to standard feed connectors.	<b>MODEL NO.</b>  AT40	<b>FINISH<sup>1</sup></b>  ● <b>BK</b> -Black ○ <b>WH</b> -White	<b>DIMENSIONS</b>  

<sup>1</sup> For other options and availabilities please contact factory.

## TRACK JOINERS AND JOINER FEEDS


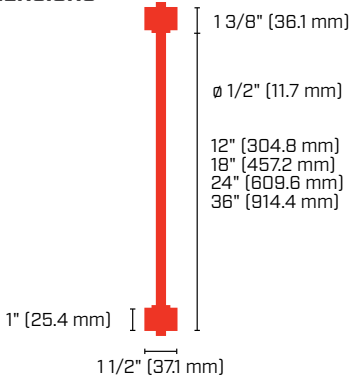




	<b>THREE WAY «L» JOINER</b>  Used to join two track sections to make a 90° angle or modify to straight by removing the cover and installing the straight accessory included. Can also be used as an in-line power feed.	<b>MODEL NO.</b>  AT23	<b>FINISH<sup>1</sup></b>  ● BK-Black ○ WH-White	<b>DIMENSIONS</b>  
	<b>T-CONNECTOR</b>  Connects three track sections in a T shape configuration. Can also be used as an in-line power feed.  <b>REVERSE POLARITY</b>  For use in opposite polarity orientation compared to standard feed connectors.	<b>MODEL NO.</b>  AT24  AT24B	<b>FINISH<sup>1</sup></b>  ● BK-Black ○ WH-White	<b>DIMENSIONS</b>  
	<b>X-CONNECTOR</b>  Connects four track sections in an X configuration, for two separate 90° runs. Can also be used as an in-line power feed.	<b>MODEL NO.</b>  AT25	<b>FINISH<sup>1</sup></b>  ● BK-Black ○ WH-White	<b>DIMENSIONS</b>  

## TRACK JOINERS

	<b>MINI-CONNECTOR CONDUCTIVE</b>  Connects two track sections end to end for a seamless continuous run.	<b>MODEL NO.</b>  AT22	<b>FINISH<sup>1</sup></b>  ● BK-Black ○ WH-White	<b>DIMENSIONS</b>  
	<b>FLEXIBLE CONNECTOR</b>  This flexible connector connects two track sections end to end, with angles from 60° to 180°. Suitable to use to transition from wall-to-wall, wall-to-ceiling, or ceiling to ceiling.	<b>MODEL NO.</b>  AT28	<b>FINISH<sup>1</sup></b>  ● BK-Black ○ WH-White	<b>DIMENSIONS</b>  

<sup>1</sup> For other options and availabilities please contact factory.

## ACCESSORIES

	<p><b>LINE VOLTAGE EXTENSION</b></p> <p>This extension wands suspend track head down from track at desired height. Available with the length of 12", 18", 24" and 36".</p> <p>Non-stocking SKUs, please consult factory for more information.</p>	<p><b>MODEL NO.</b></p> <p>ALVE12 ALVE18 ALVE24 ALVE36</p>	<p><b>FINISH<sup>1</sup></b></p> <p>● <b>BK</b>-Black ○ <b>WH</b>-White</p>	<p><b>DIMENSIONS</b></p>  <p>1 3/8" (36.1 mm) ø 1/2" (11.7 mm) 12" (304.8 mm) 18" (457.2 mm) 24" (609.6 mm) 36" (914.4 mm) 1" (25.4 mm) 1 1/2" (37.1 mm)</p>
	<p><b>GROUNDING OUTLET</b></p> <p>Provides electrical receptacle on to a track.</p>	<p><b>MODEL NO.</b></p> <p>AT33</p>	<p><b>FINISH<sup>1</sup></b></p> <p>● <b>BK</b>-Black ○ <b>WH</b>-White</p>	<p><b>DIMENSIONS</b></p>  <p>2 31/64" (63.1 mm) 1 1/2" (38.1 mm)</p>
	<p><b>UTILITY HOOK</b></p> <p>Non-electrical hook can support up to 10 lbs.</p>	<p><b>MODEL NO.</b></p> <p>AT34</p>	<p><b>FINISH<sup>1</sup></b></p> <p>● <b>BK</b>-Black ○ <b>WH</b>-White</p>	<p><b>DIMENSIONS</b></p>  <p>1 33/64" (38.5 mm) 2 9/16" (65.1 mm)</p>

<sup>1</sup> For other options and availabilities please contact factory.

# EXAMPLE OF TRACK SYSTEM INSTALLATION

