

W6C LED FULL CUTOFF WALL PACK

SELECTABLE COLOR TEMPERATURE (3 000/4 000/5 000 K)
 POWER SELECTABLE
 INTEGRATED PHOTOCELL
 MULTI-VOLTAGE (120-347 V)



The W6C full cutoff series is built with a modern design which includes heat sinks in the front of the housing to allow for optimal performance. This luminaire has an integrated photocell and features the latest in LED technology by allowing the user to control the color temperature and power by using the internal field adjustable integrated switches. Typical applications include entrances or anywhere security lighting is required.

FEATURES & SPECIFICATIONS

CONSTRUCTION

Housing

- This luminaire is made of aluminum die cast and comes in a bronze powder coat finish
- The housing has 4 conduit entries of 1/2" on each side
- Each model has an integrated button type photocell that can be easily turned off

Lens

Each luminaire is outfitted with a clear polycarbonate lens and offered in a type III distribution pattern.

TECHNICAL SPECIFICATIONS

- 0-10 V dimming
- Color temperature: 3 000/4 000/5 000 K, default setting 4 000 K
- Estimated lifespan of 50 000 hours to L70
- Ambient temperature: -40°C to +50°C
- 4 kV surge protection

COMPLIANCES

- Wet location
- IP65
- IK08
- Meets requirements of ICES-005 5 for class B products
- cULus
- RoHS

OVERVIEW			
LIGHT SOURCE	LED	EFFICACY (LM/W)	122 - 161
WATTS (W)	25/40/60	COLOR TEMPERATURE (K)	3 000/4 000/5 000
	80/100	CRI	80
LUMEN OUTPUT (LM)	3 275 - 14 299	WEIGHT (LBS)	6.83 - 10.58

¹ WARRANTY
5 YEAR WARRANTY

CCT[±] 3CCT SELECTABLE

W[±] POWER SELECTABLE

QUICKSHIP

LED

DIMMABLE

WET LOCATION

65 IP RATING

ICES 005

IK08 IMPACT RESISTANCE

DLC LISTED

UL CERTIFIED

RoHS

ida DARK SKY APPROVED²

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

¹ Based on a maximum usage of 12 hours per day.

² When the luminaire is set at 3 000 K operation. Only model W6C-PS60A3-323CBRP must be ordered for IDA certification compliance.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.




QUICK SHIP AND TECHNICAL SPECIFICATION TABLE

MODEL NUMBER	DLC UNIQUE ID	WATTS [W]	VOLTS [VAC]	COLOR TEMP. [K]	LUMEN OUTPUT [LM] ²	EFFI-CACY [LM/W]	CRI	LIFE L70 [HRS]	DIS-TRIB. TYPE	FINISH	DIM-MING	PF	THD [%]	TRADITIONAL EQUIVALENT [W]		CASE QTY [MAS-TER]
														HM	SHP	
W6C-PS60A3-323CBRP	PLWEDKUXL26B	25/40/60	120-347	3 000/4 000/5 000	3 625/5 640/8 220 ²	122-137	80	50 000	III	BRONZE	YES	≥0.9	≤20%	175-400	175-250	1
W6C-PS100A3323CBRP	PLUBR2UHTA34	80/100	120-347	3 000/4 000/5 000	11 520/14 000 ²	123-140	80	50 000	III	BRONZE	YES	≥0.9	≤20%	400-1 000	250-400	1

¹ QUICK SHIP: Product availability is subject to change without notice. Please contact your Aimlite customer service representative to confirm inventory levels at time of order.

² Lumen values are based on 4 000 K default settings. Please refer to Quick Ship Technical Specification Table for more details on other color temperatures.

ORDERING GUIDE

W6C —  — **32** — **3C** —  — **P** / 

SERIES	LUMEN PACKAGE [W]	DISTRIB. TYPE	VOLTS [V]	COLOR TEMP. [K]	CASTING COLOR	MANDATORY OPTION	OPTIONS
W6C	PS60A - 25/40/60 PS100A - 80/100	2 - TYPE II 3 - TYPE III 4 - TYPE IV	32 - 120-347	3C - 3 000/ 4 000/ 5 000	BR - BRONZE (STANDARD) SP - CUSTOM COLOR	P - BUTTON TYPE PHOTOCELL	OSI - OCCUPANCY SENSOR KV - 10 KV SURGE PROTECTION

TECHNICAL SPECIFICATION TABLE

LUMEN PACKAGE	DISTRIBUTION TYPE	WATTS [W]	3 000 K			4 000 K			5 000 K		
			LUMEN OUTPUT [LM]	EFFICACY [LM/W]	LED CURRENT [MA]	LUMEN OUTPUT [LM]	EFFICACY [LM/W]	LED CURRENT [MA]	LUMEN OUTPUT [LM]	EFFICACY [LM/W]	LED CURRENT [MA]
PS60A	II	25	3 762	149	540 - 594	3 911	160	627 - 690	3 917	156	540 - 594
		40	5 699	144	876 - 964	6 001	158	627 - 690	5 874	149	876 - 964
		60	7 921	135	1 265 - 1 391	8 355	153	627 - 690	8 119	140	1 265 - 1 391
	III	25	3 275	131	540 - 594	3 625	145	627 - 690	3 500	140	540 - 594
		40	5 000	125	876 - 964	5 640	141	627 - 690	5 280	132	876 - 964
		60	7 290	122	1 265 - 1 391	8 220	137	627 - 690	7 860	131	1 265 - 1 391
	IV	25	3 631	144	540 - 594	3 783	154	627 - 690	3 816	150	540 - 594
		40	5 502	138	876 - 964	5 800	152	627 - 690	5 724	145	876 - 964
		60	7 414	129	1 265 - 1 391	7 999	147	627 - 690	7 801	135	1 265 - 1 391
PS100A	II	80	11 548	144	1 704 - 1 875	12 312	161	955 - 1 050	11 994	150	1 705 - 1 875
		100	13 251	139	2 088 - 2 297	14 299	158	955 - 1 050	13 737	144	2 088 - 2 297
	III	80	10 160	127	1 704 - 1 875	11 520	144	955 - 1 050	10 720	134	1 705 - 1 875
		100	12 300	123	2 088 - 2 297	14 000	140	955 - 1 050	13 300	133	2 088 - 2 297
	IV	80	10 974	136	1 704 - 1 875	11 810	154	955 - 1 050	11 488	144	1 705 - 1 875
		100	12 909	135	2 088 - 2 297	13 522	149	955 - 1 050	13 062	137	2 088 - 2 297

Default programming

W6C-PS60A3-323CBRP: 60 W / 4 000 K


W6C-PS100A3323CBRP: 100 W / 4 000 K

ACCESSORIES (ORDER SEPARATELY)


PART NUMBER	DESCRIPTION
HAR1130	18" BRONZE METAL BACKPLATE
KIT-HAR1024-TP	VANDAL RESISTANT SCREWS KIT

DIMENSIONS


W6C-PS60A3-323CBRP

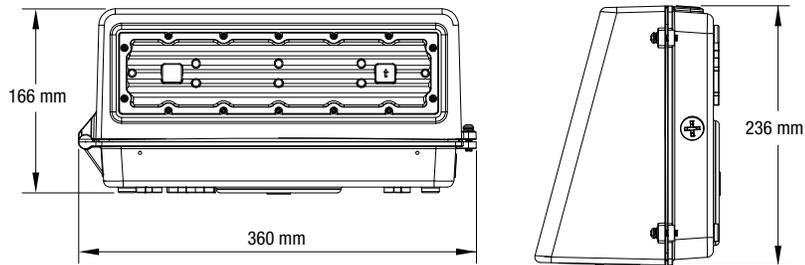

W6C-PS100A3323CBRP

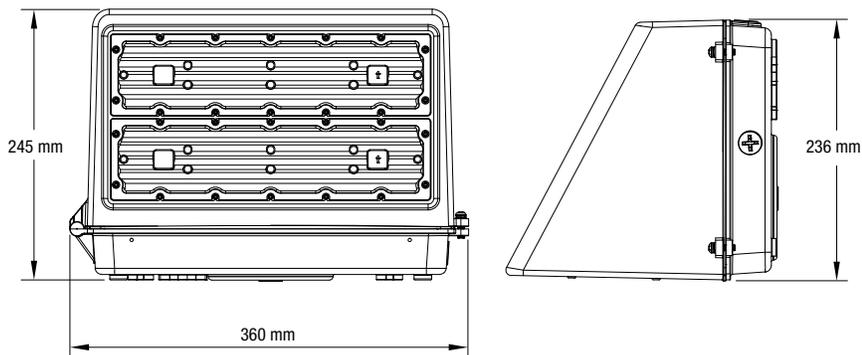


BACKPLATE HAR1130

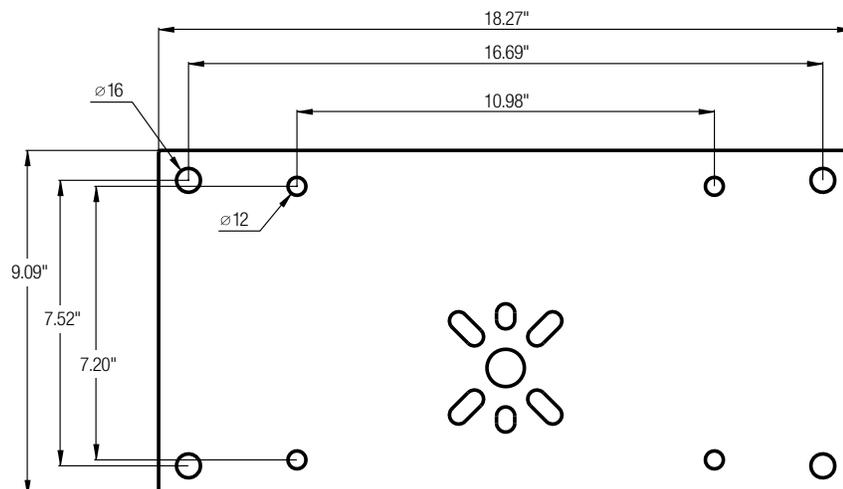

PHOTOMETRIC DATA¹

W6C-PS60A3-323CBRP • 25W • 3 620.3 LM

POLAR CANDELA DISTRIBUTION

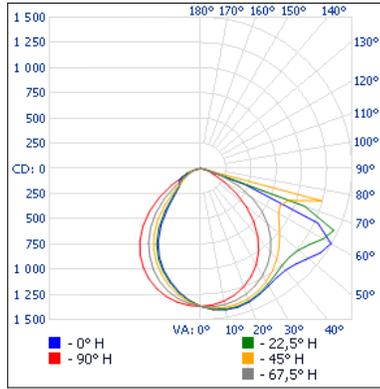

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	1 041.1	28.8%
0-40	1 675.7	46.3%
0-60	2 885.0	79.7%
60-90	735.3	20.3%
70-100	228.2	6.3%
90-120	0	0%
0-90	3 620.3	100%
90-180	0	0%
0-180	3 620.3	100%


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
7'	4.74	41.6'	40.9'
34'	1.18	83.2'	81.8'
51'	0.83	124.8'	122.7'
68'	0.3	166.4'	163.7'
85'	0.19	208.0'	204.6'
102'	0.13	249.6'	245.5'

■ Vert. Spread: 101.5° ■ Hor. Spread: 100.5°

W6C-PS60A3-323CBRP • 40 W • 5 632.6 LM

POLAR CANDELA DISTRIBUTION

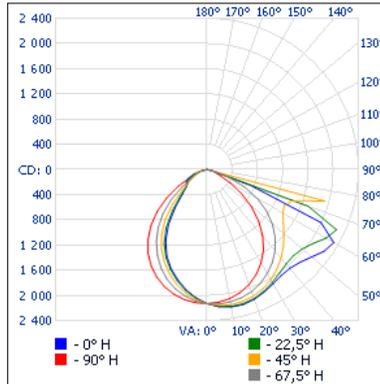

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	1 619.8	28.8%
0-40	2 607.2	46.3%
0-60	4 488.7	79.7%
60-90	1 144.0	20.3%
70-100	355.1	6.3%
90-120	0	0%
0-90	5 632.6	100%
90-180	0	0%
0-180	5 632.6	100%


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
17'	7.73	41.6'	40.9'
34'	1.84	83.2'	81.8'
51'	0.82	124.8'	122.7'
68'	0.46	166.4'	163.7'
85'	0.29	208.0'	204.6'
102'	0.2	249.6'	245.5'

■ Vert. Spread: 101.5° ■ Hor. Spread: 100.5°

W6C-PS60A3-323CBRP • 60 W • 8 209.2 LM

POLAR CANDELA DISTRIBUTION

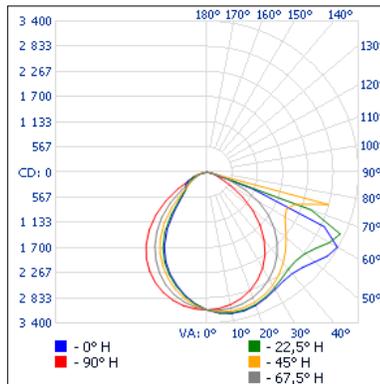

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	2 360.8	28.8%
0-40	3 799.9	46.3%
0-60	6 542.0	79.7%
60-90	1 667.3	20.3%
70-100	517.5	6.3%
90-120	0	0%
0-90	8 209.2	100%
90-180	0	0%
0-180	8 209.2	100%

ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
17'	10.7	41.6'	40.9'
34'	2.68	83.2'	81.8'
51'	1.19	124.8'	122.7'
68'	0.67	166.4'	163.7'
85'	0.43	208.0'	204.6'
102'	0.3	249.6'	245.5'


■ Vert. Spread: 101.5° ■ Hor. Spread: 100.5°

¹ Complete IES files available on our website.

PHOTOMETRIC DATA¹

W6C-PS100A3-323CBRP • 80 W • 11 505.8 LM

POLAR CANDELA DISTRIBUTION

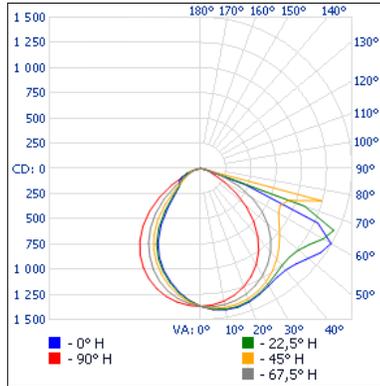

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	3 162.6	27.5%
0-40	5 081.7	44.2%
0-60	8 754.6	76.1%
60-90	2 656.3	23.1%
70-100	1 066.8	9.3%
90-120	29.1	0.3%
0-90	11 410.9	99.2%
90-180	95	0.8%
0-180	11 505.8	100%


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
17'	14.6	42.4'	42.9'
34'	3.65	84.8'	85.9'
51'	1.62	127.2'	128.8'
68'	0.91	169.6'	171.7'
85'	0.58	212.0'	214.7'
102'	0.41	254.4'	257.6'

■ Vert. Spread: 102.6° ■ Hor. Spread: 103.3°

W6C-PS100A3-323CBRP • 100 W • 13 982.8 LM

POLAR CANDELA DISTRIBUTION

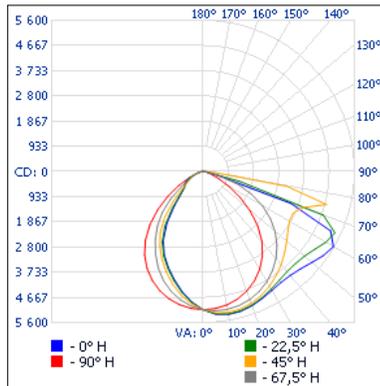

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	3 843.4	27.5%
0-40	6 175.7	44.2%
0-60	10 639.3	76.1%
60-90	3 228.1	23.1%
70-100	1 296.4	9.3%
90-120	35.4	0.3%
0-90	13 867.4	99.2%
90-180	115.4	0.8%
0-180	13 982.8	100%

ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
17'	7.73	41.6'	40.9'
34'	1.84	83.2'	81.8'
51'	0.82	124.8'	122.7'
68'	0.46	166.4'	163.7'
85'	0.29	208.0'	204.6'
102'	0.2	249.6'	245.5'

■ Vert. Spread: 102.6° ■ Hor. Spread: 103.3°

¹ Complete IES files available on our website.