



## **FEATURES**

- Die-cast aluminum housing available in a bronze, black and white finishes
- Integrated photocell which can be easily disabled
- CCT select switch is discretely placed inside the housing
- The housing has two 1/2" conduit entries, located at the top and at the back
- Polycarbonate prismatic lens.













DIMMABLE















1CCT SELECTABLE ON MOST OF CONFIGURATIONS. CONSULT QUICK SHIP AND TECHNICAL SPECIFICATION TABLE FOR MORE DETAILS.

**Aim**Lite

OVW-L


т 514 227-1288


TF 1866 348-2374



PART NUMBER	WATTS (W)	VOLTS [VAC]		LUMEN OUTPUT (LM) <sup>2</sup>			LIFE L70 (HRS) <sup>3</sup>				LED CURRENT (MA)		PHOTOCELL (YES/NO)4	DIMMING (YES/ NO)	PF	THD (%)	TRADITIONAL EQUIVALENT (W)	
CCT SELECTABLE WITH INTEGRATED PHOTOCELL																		
OVW-LA1-2-3C-BR	15	120-277	3 000/4 000/5 000	1884	132	80+	163 000	9 000	III	BO U2 G1	0,21-0,057	BRONZE	YES	YES	0.931	7.4	70	17
OVW-LA1-2-3C-BK	15	120-277	3 000/4 000/5 000	1884	132	80+	163 000	9 000	Ш	BO U2 G1	0,21-0,057	BLACK	YES	YES	0.931	7.4	70	17
OVW-LA1-2-3C-WH	15	120-277	3 000/4 000/5 000	1884	132	80+	163 000	9 000	III	BO U2 G1	0,21-0,057	WHITE	YES	YES	0.931	7.4	70	17

## **DIMENSIONS AND WEIGHTS**

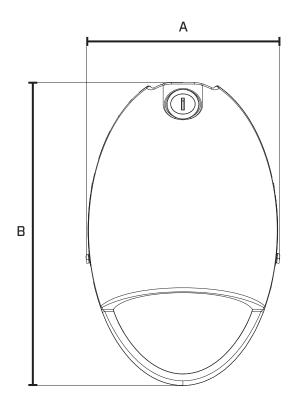

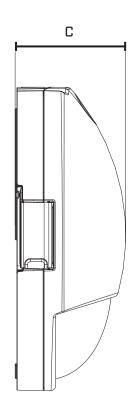

A IN. [CM]	6 5/8" (16.8)							
B IN. (CM)	10 3/8" (26.3)							
C IN. (CM)	3 3/4" (9.61)							
NET WEIGHT (LBS)	3.21							

¹CCT SELECTABLE ON MOST OF CONFIGURATIONS. CONSULT QUICK SHIP AND TECHNICAL SPECIFICATION TABLE FOR MORE DETAILS.



<sup>&</sup>lt;sup>1</sup> Typical color temperature range: +/- 5 %.
<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.
<sup>3</sup> Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.
<sup>4</sup> Integrated ON/OFF photocell that can be easily disabled.